船用同轴缆 Marine Coaxial cable

HF Flame Oil Cold UV

RG 6 UFL SHF1




应用 Application

该电缆用于船舶和海上。The cable is used for ship and offshore .

产品符合 MIL C-17 或 MIL C-17F 标准。The product complying with MIL C-17 or MIL C-17F standard.

结构 Construction

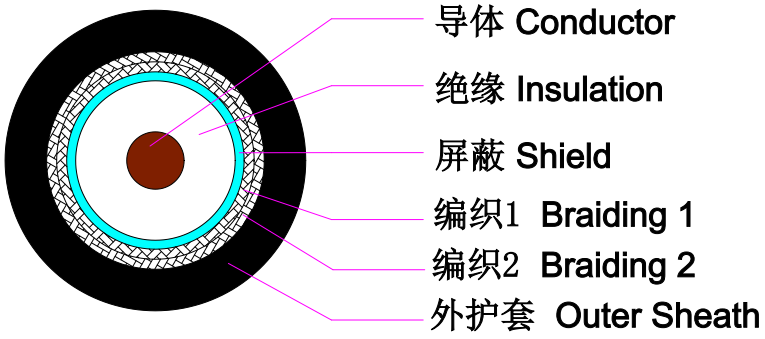

导体 Conductor	裸铜（0.72mm）	Bare copper wire（0.72mm）
绝缘 Insulation	实心 PE OD：4.70±0.15mm	Solid PE OD：4.70±0.15mm
屏蔽 Shield	铝箔	Al/polyester tape
编织 1 Braiding1	镀银铜丝编织，覆盖率≥96%	Silver coated copper braiding，coverage≥96%
编织 2 Braiding2	镀锡铜丝编织，覆盖率≥96%	Tinned copper wire braiding，coverage≥96%
外护套 Outer Sheath	SHF1 颜色：黑色或定制 OD：8.5± 0.3mm	SHF1 Color ：Black or as customer's request OD：8.5± 0.3mm
印字 Marking	Hysin□MARINE□Cable□RG6□UFL□SHF1□IEC60332-3-22□****m□xxxxxx□WW/YY 注：□ 表示空格；****m 表示计米；xxxxxx 表示批号;WW/YY 表示周数/年份 Note：□ means blank；****m means meters；xxxxxx means batch number；WW/YY means week/year	

电气性能 Electrical Characteristics（20℃）

阻抗	Impedance	75±3Ω
电容	Capacitance	67 pF/m
传播速率	Propagation velocity	≥60%
绝缘电阻	Insulation resistance	10000 MΩ.km
耐压试验	Test Voltage	2 KV DC/min

传输性能 Transmission Characteristics（20℃）

频率 Frequency (MHZ)	衰减 Attenuation (@20℃ dB/100m)	频率 Frequency (MHZ)	衰减 Attenuation (@20℃ dB/100m)
50	5.70	1350	32.6
100	8.10	1500	34.6
200	11.7	1750	38.7
300	14.5	2150	44.1
500	19.0	2250	44.5
600	21.0	2500	46.6
800	24.6	2750	49.3
1000	27.7	3000	53.4
回波损耗 Return loss dB（MHZ）			
5—1000	≥20		
1000—2000	≥18		
2000—3000	≥16		
屏蔽效能 Screening effectiveness dB（MHZ）			
5—1000	≥75		
1000—2000	≥65		
2000—3000	≥55		

其他性能 Other Characteristics

工作温度	Operating temperature	-40℃ to 90℃
安装温度	Installation temperature	-20℃ to 60℃
卤酸气体	Acid Gas Release Mounts	≤5mg/g (IEC 60754-1)
燃烧气体 PH 值	Burning Occur Gas Acidity	PH≥4.3 (IEC 60754-2)
燃烧气体导电率	Burning Occur Gas conductivity	<10 μS/mm (IEC 60754-2)
烟密度	Smoke density	≥60%（IEC 61034-2）
阻燃性	Flame resistance	IEC 60332-3-22, IEC 60332-1-2
耐油	Oil resistance (SHF1)	IRM902, 70℃×4H
抗紫外线	UV resistance	UL1581
氧指数	Oxygen Index	ASTM-D2863-23（≥30%）
冷弯曲	Cold bend test	EN 50288-1（-52℃）
爆炸性环境	Explosive atmospheres	IEC 60079-14
弯曲半径	Bending radius	8xOD(OD=cable diameter)
护套材料性能	The jacket material performance	IEC 60092-360

This cable meets RoHS requirements

Prepared by: J.Zhou	Checked by: CL.Wang	Approved by: SY.Xiang