船用同轴缆 Marine Coaxial cable

HF Flame Oil Cold UV MUD

RF 600-50 UFL SHF-MUD



应用 Application


该电缆用于船舶和海上。

产品符合 MIL C-17 ， MIL C-17F 标准。

The cable is used for ship and offshore.

The product complying with MIL C-17 or MIL C-17F standard.

结构 Construction

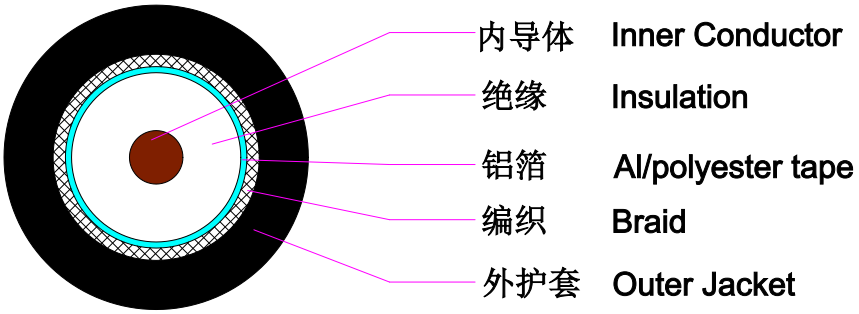

型号 Type	RF 600-50	
内导体 Inner conductor	铜包铝 OD: 4.45mm	CCA OD: 4.45mm
绝缘 Insulation	发泡 PE OD: 11.70±0.25mm	Foamed PE OD: 11.70±0.25mm
外导体 Outer Conductor	铝箔+镀锡铜丝编织，覆盖率≥96% OD: 12.6±0.25mm	Al/polyester tape + Tinned copper wire braid，coverage≥96% OD: 12.6±0.25mm
外护套 Outer Jacket	SHF-MUD OD: 15.00±0.50mm 黑色或定制	SHF-MUD OD: 15.00±0.50mm Black or as customer's request
印字 Marking	Hysin□MARINE□Cable□RF□600-50□UFL□SHF-MUD□IEC60332-3-22□NEK606□****m□xxxxxx□WW/YY 注：□ 表示空格；****m 表示计米；xxxxxx 表示批号;WW/YY 表示周数/年份 Note：□ means blank；****m means meters；xxxxxx means batch number；WW/YY means week/year	

电气性能 Electrical Characteristics（20℃）

特性阻抗	Characteristic Impedance(Ω)	50±2
标称电容	Nominal Capacitance(pF/m)	76
传输速率	Transmission Rate（%）	≥75
绝缘电阻	Insulation Resistance（MΩ·km）	＞10000
耐压试验	Test Voltage	6 kV

传输特性 Transmission Characteristics

频率 Frequency（MHZ）	衰减 Attenuation（@20℃dB/100m） RF 600-50
30	1.40
50	1.80
150	3.20
220	4.00
450	6.20
900	8.60
1500	10.90
1800	12.10
2000	13.40
2500	14.90
5800	24.30
屏蔽效能 dB（MHZ） Screening effectiveness	≥90 dB

其他性能 Other Characteristics

工作温度	Operating temperature	-40℃ to 90℃
安装温度	Installation temperature	-20℃ to 60℃
卤酸气体	Acid Gas Release Mounts	≤5mg/g (IEC 60754-1)
燃烧气体 PH 值	Burning Occur Gas Acidity	PH≥4.3 (IEC 60754-2)
燃烧气体导电率	Burning Occur Gas conductivity	<10 μS/mm (IEC 60754-2)
烟密度	Smoke density	≥60%（IEC 61034-2）
阻燃性	Flame resistance	IEC 60332-3-22, IEC 60332-1-2
耐泥浆	MUD resistance	NEK 606 （For MUD resistant cable）
耐油	Oil resistance (SHF2)	IRM902, 100℃×24H(For SHF2 sheath cable)
抗紫外线	UV resistance	UL1581
氧指数	Oxygen Index	ASTM-D2863-23（≥30%）
冷弯曲	Cold bend test	EN 50288-1（-52℃）
爆炸性环境	Explosive atmospheres	IEC 60079-14
弯曲半径	Bending radius	8xOD(OD=cable diameter)
护套材料性能	The jacket material performance	IEC 60092-360

This cable meets RoHS requirements

技术参数 Technical Parameters

型号 Type	规格 Spec	外护套 Outer Jacket	外径 Diameter （mm）
RF	600-50	SHF-MUD	15.00±0.50mm

Prepared by: J.Zhou	Checked by: CL.Wang	Approved by: SY.Xiang