船用同轴缆 Marine Coaxial cable

HF Flame Oil Cold UV MUD

RG 213 UFL SHF-MUD




应用 Application

该电缆用于船舶和海上。The cable is used for ship and offshore .

产品符合 MIL C-17 或 MIL C-17F 标准。The product complying with MIL C-17 or MIL C-17F standard.

结构 Construction

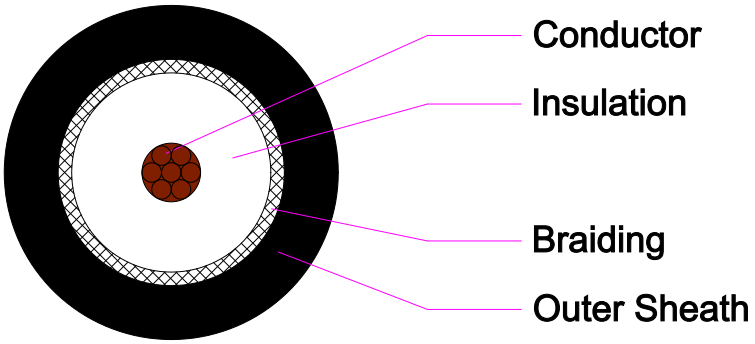

导体 Conductor	7x0.75mm 多股镀锡铜导体	7x0.75mm Tinned copper wire
绝缘 Insulation	实心 PE OD：7.25±0.15mm	Solid PE OD：7.25±0.15mm
编织 Braiding	镀锡铜丝编织，覆盖率≥96%	Tinned copper wire braiding, coverage≥96%
外护套 Outer Sheath	SHF-MUD OD：10.3± 0.30mm 颜色：黑色或定制	SHF-MUD OD：10.3± 0.30mm Color ： Black or as customer's request
印字 Marking	Hysin□MARINE□Cable□RG213□UFL□SHF-MUD□IEC60332-3-22□NEK606□****m□xxxxxx□WW/YY 注：□ 表示空格；****m 表示计米；xxxxxx 表示批号;WW/YY 表示周数/年份 Note：□ means blank；****m means meters；xxxxxx means batch number；WW/YY means week/year	

电气性能 Electrical Characteristics（20℃）

阻抗	Impedance	50±2 Ω
电容	Capacitance	101 pF/m
传播速率	Propagation velocity	≥60 %
耐压试验	Test Voltage	5.0 KV

传输性能 Transmission Characteristics（20℃）

频率 Frequency (MHZ)	衰减 Attenuation (@20℃ dB/100m)	频率 Frequency (MHZ)	衰减 Attenuation (@20℃ dB/100m)
50	3.80	1350	23.90
100	5.50	1500	25.30
200	8.00	1750	27.90
300	10.10	2150	31.50
500	13.20	2250	32.40
600	14.80	2500	34.70
800	17.50	2750	36.70
1000	20.00	3000	38.30
回波损耗 Return loss dB（MHZ）			
5—1000	≥20		
1000—2000	≥18		
2000—3000	≥16		
屏蔽效能 Screening effectiveness dB（MHZ）			
100—900	＞62		
900—2000	＞65		
2000—3000	＞55		

其他性能 Other Characteristics

工作温度	Operating temperature	-40℃ to 90℃
安装温度	Installation temperature	-20℃ to 60℃
卤酸气体	Acid Gas Release Mounts	≤5mg/g (IEC 60754-1)
燃烧气体 PH 值	Burning Occur Gas Acidity	PH≥4.3 (IEC 60754-2)
燃烧气体导电率	Burning Occur Gas conductivity	<10 μS/mm (IEC 60754-2)
烟密度	Smoke density	≥60%（IEC 61034-2）
阻燃性	Flame resistance	IEC 60332-3-22, IEC 60332-1-2
耐泥浆	MUD resistance	NEK 606 （For MUD resistant cable）
耐油	Oil resistance (SHF2)	IRM902, 100℃×24H(For SHF2 sheath cable)
抗紫外线	UV resistance	UL1581
氧指数	Oxygen Index	ASTM-D2863-23（≥30%）
冷弯曲	Cold bend test	EN 50288-1（-52℃）
爆炸性环境	Explosive atmospheres	IEC 60079-14
弯曲半径	Bending radius	8xOD(OD=cable diameter)
护套材料性能	The jacket material performance	IEC 60092-360
重量	Weight	160±10 kg/km

This cable meets RoHS requirements.

Prepared by: J.Zhou	Checked by: CL.Wang	Approved by: SY.Xiang