船用同轴缆 Marine Coaxial cable

RG 214 UFL SHF2

HF Flame Oil Cold UV




应用 Application

该电缆用于船舶和海上。The cable is used for ship and offshore .

产品符合 MIL C-17 或 MIL C-17F 标准。The product complying with MIL C-17 or MIL C-17F standard.

结构 Construction

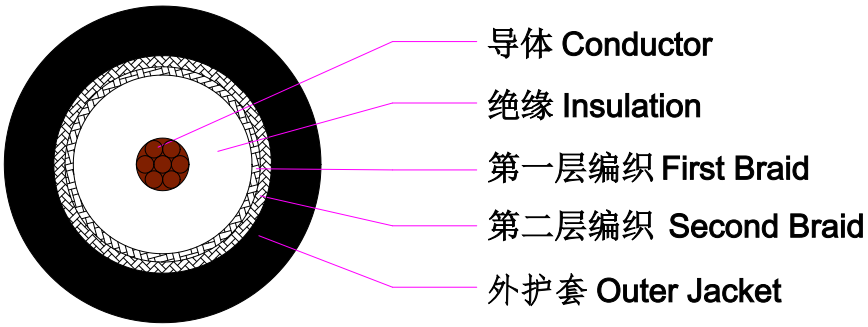

导体 Conductor	镀银铜导体（7x0.75mm）	Silver coated Copper（7x0.75mm）
绝缘 Insulation	实心 PE OD：7.25±0.15mm	Solid PE OD：7.25±0.15mm
第一层编织 First Braid	镀银铜编织 密度≥96%	Silver-coated copper wire braid，coverage≥96%
第二层编织 Second Braid	镀锡铜编织 密度≥96%	Tinned copper wire braid，coverage≥96%
外护套 Outer Jacket	SHF2 OD：11.3 ± 0.3mm 颜色：黑色或定制	SHF2 OD：11.3 ± 0.3mm Color ：Black or as customer's request
印字 Marking	Hysin□MARINE□Cable□RG214□UFL□SHF2□IEC60332-3-22□****m□xxxxxx□WW/YY 注：□ 表示空格；****m 表示计米；xxxxxx 表示批号;WW/YY 表示周数/年份 Note：□ means blank；****m means meters；xxxxxx means batch number；WW/YY means week/year	

电气性能 Electrical Characteristics（20℃）

阻抗	Impedance	50±2 Ω
电容	Capacitance	101 pF/m
传播速率	Propagation velocity	≥60 %
耐压试验	Test Voltage	5.5 KV

传输性能 Transmission Characteristics（20℃）

频率 Frequency (MHZ)	衰减 Attenuation (@20℃ dB/100m)	频率 Frequency (MHZ)	衰减 Attenuation (@20℃ dB/100m)
50	4.80	1350	32.00
100	6.80	1500	34.50
200	10.00	1750	37.50
300	12.80	2150	42.80
500	17.10	2250	44.00
600	19.10	2500	47.00
800	23.00	2750	50.50
1000	26.50	3000	54.00
回波损耗 Return loss dB（MHZ）			
5—1000	≥20		
1000—2000	≥18		
2000—3000	≥16		
屏蔽效能 Screening effectiveness dB（MHZ）			
100—900	＞62		
900—2000	＞65		
2000—3000	＞55		

其他性能 Other Characteristics

工作温度	Operating temperature	-40℃ to 90℃
安装温度	Installation temperature	-20℃ to 60℃
卤酸气体	Acid Gas Release Mounts	≤5mg/g (IEC 60754-1)
燃烧气体 PH 值	Burning Occur Gas Acidity	PH≥4.3 (IEC 60754-2)
燃烧气体导电率	Burning Occur Gas conductivity	<10 μS/mm (IEC 60754-2)
烟密度	Smoke density	≥60%（IEC 61034-2）
阻燃性	Flame resistance	IEC 60332-3-22, IEC 60332-1-2
耐油	Oil resistance (SHF2)	IRM902, 100℃×24H
抗紫外线	UV resistance	UL1581
氧指数	Oxygen Index	ASTM-D2863-23（≥30%）
冷弯曲	Cold bend test	EN 50288-1（-52℃）
爆炸性环境	Explosive atmospheres	IEC 60079-14
弯曲半径	Bending radius	8xOD(OD=cable diameter)
护套材料性能	The jacket material performance	IEC 60092-360
重量	Weight	195±10 kg/km

This cable meets RoHS requirements

Prepared by: J.Zhou	Checked by: CL.Wang	Approved by: SY.Xiang